

Größe Schachtausschnitt


Ausschnittmass der Türen		
Halteebene	Breite	Höhe
A 0	1400	2250
C 1	1400	2250
C 2	1400	2150

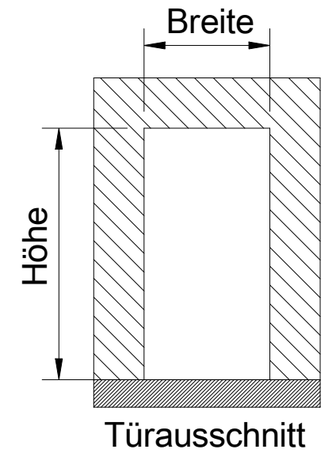

Türausschnitt

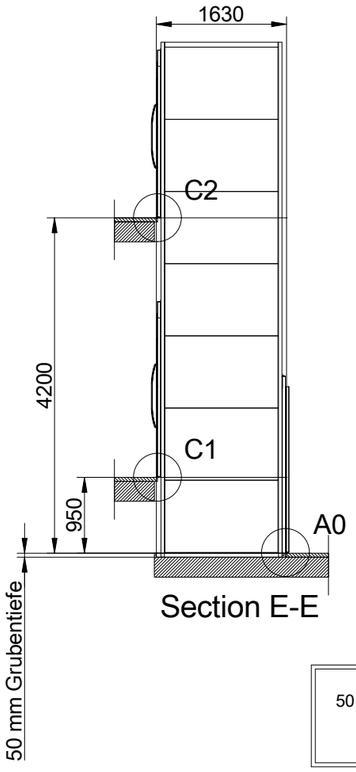


Section E-E

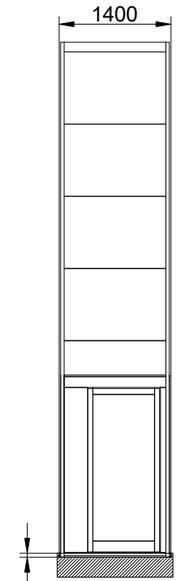


Section G-G

50 mm Grubentiefe mit flachem Einlass + 10 mm, - 0 mm




(1:75)




(1:75)

A0 (1:5)

C1,2 (1:5)



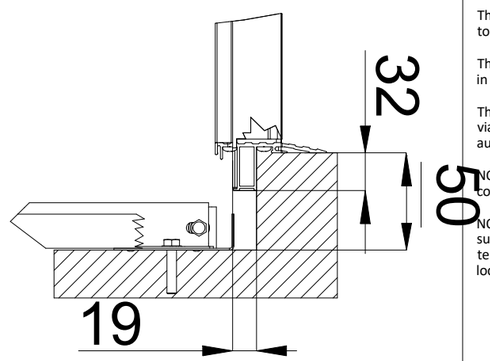

Incoming power supply is connected at landing:

For wiring and power supply, refer to the unit´s wiring diagrams.
Ceiling shaft lighting, is independent from the power cable and pulled back into the trench´s upper part. Shaft lighting > 50 lux.

NOTE! An effective emergency telephone is required for approved inspection.
The purchaser is responsible for an active phone line being present prior to the lift installation.

The incoming telephone line is connected to CiLow (TELE). Refer to wiring diagram.

The emergency signal device is powered by the lift's own battery in the event of a power failure.

The lift must be equipped with a two-way communication, either via the standard telephone or via the lift telephone, which automatically calls the alarm control center or the like.

NOTE! A lift featuring a frequency converter cannot be directly connected to a RCD.

NOTE! The platform lift shall be connected to a dedicated power supply conforming with EN 60204-1:2018,
terminating at a main switch and fuse or overload with a means to lock it in the 'off' position or disconnected state

Genehmigt durch
Baumeister:

_____

European view placement:

Cibes

Ausschreibungsnr	2024072523555
Bestellnummer	
Allgemeintoleranzen	SS-ISO 27681-1 m
Datum	2024-08-01 20:03
Blatt	2 of 7
Maßstab:	A3, 1:55

Hauptzeichnung

A 5000 - 1000*1467
Ausschnittgröße
Harald Wollmayr